



13. Lift Chains or Lift Loops? (Determined by the Forklift attachments) (circle answer)

Board Details:


14. Provide desired dock board width. _____ (The dock board should be 2 to 4 inches less than the minimum car door width encountered at this site.)

15. Is this a replacement for an existing board? **Y** **N** (If YES, provide a sketch indicating box length, car side lip length, dock side lip length and a measurement from the deck surface to the bottom of the car and dock side lips.)

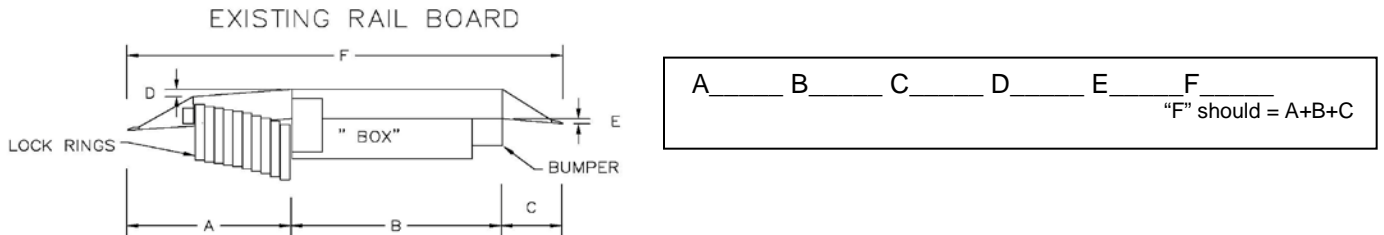


16. Degree of flare 0, 10, 20 or 30? (X dimensions less than 48" can prevent flare).

17. For Car-to-Car applications please provide the **Z** _____ and **G** _____ dimensions.

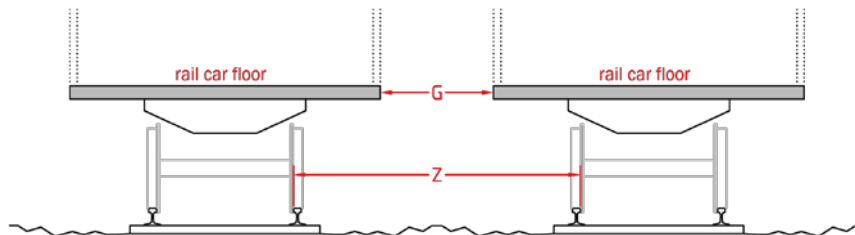

Additional Track Details:

18. Does the track curve? If so, please provide additional measurements as shown below.

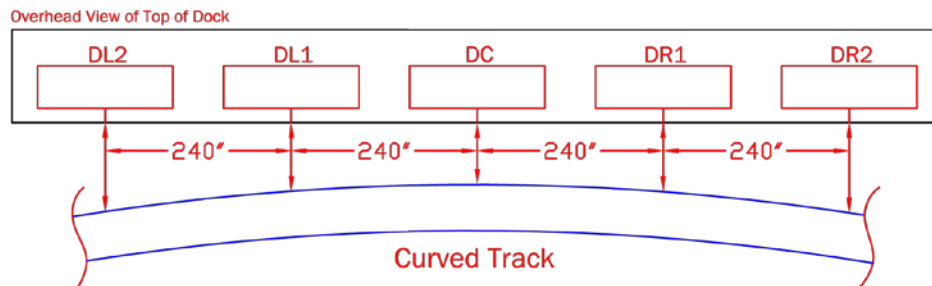

19. Please note correct method for setting a Bluff rail board in place for use.

