




Lo-Dock Levelers Model LD

Raise the height of your present dock as much as 11" without expensive dock alterations. Lo-Dock Levelers can easily be installed on any concrete dock without welding or modifications. Complete technical information and installation instructions are available upon request.


Bluff's Edge of Dock Leveler is designed to have a working range of 5" above and 5" below dock.

- Completely assembled
- No site welding required
- Available in 20,000; 25,000; and 30,000 lb. capacities.
- Hydraulic assist and refrigerated lip available as options. Hydraulic assist can be retrofitted on existing units, or is available as an add-on option.


Because of gradeability problems, dock levelers are not recommended for use with pallet jacks or stackers.

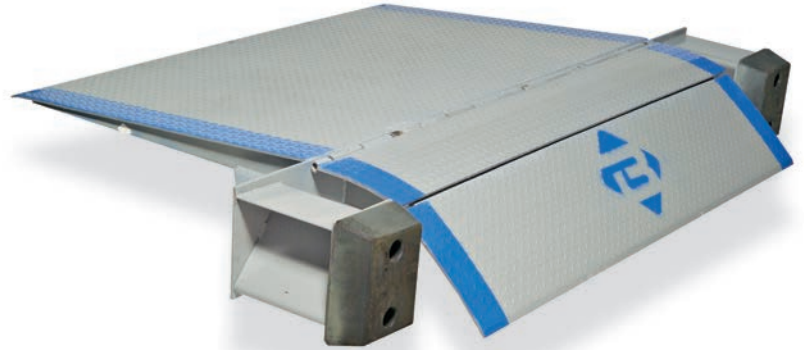




Lo-Dock Leveler (LD)

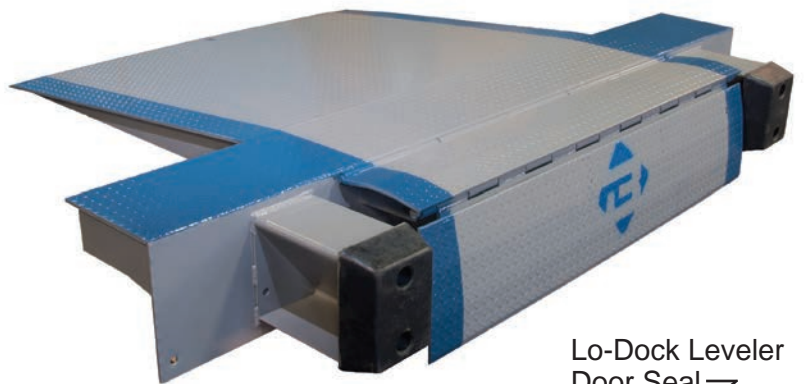

Lo-Dock Leveler
Door Seal

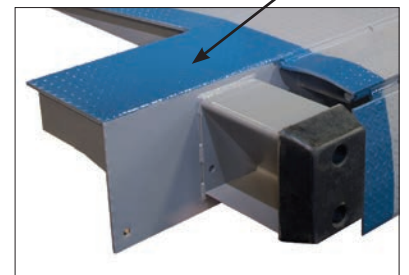

Lo-Dock Levelers Model LD

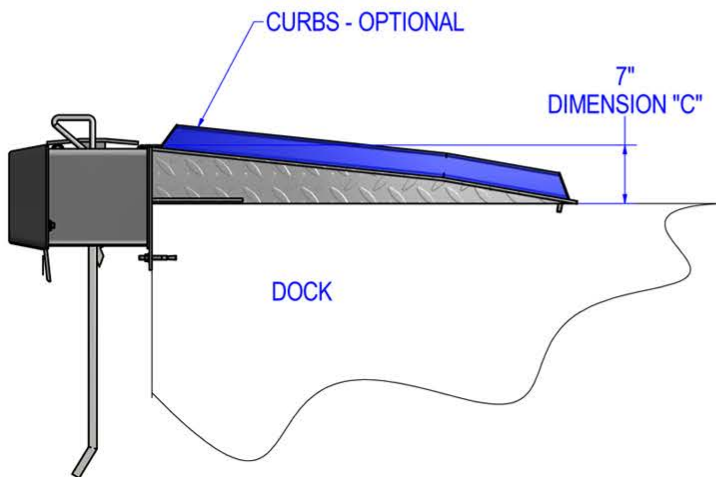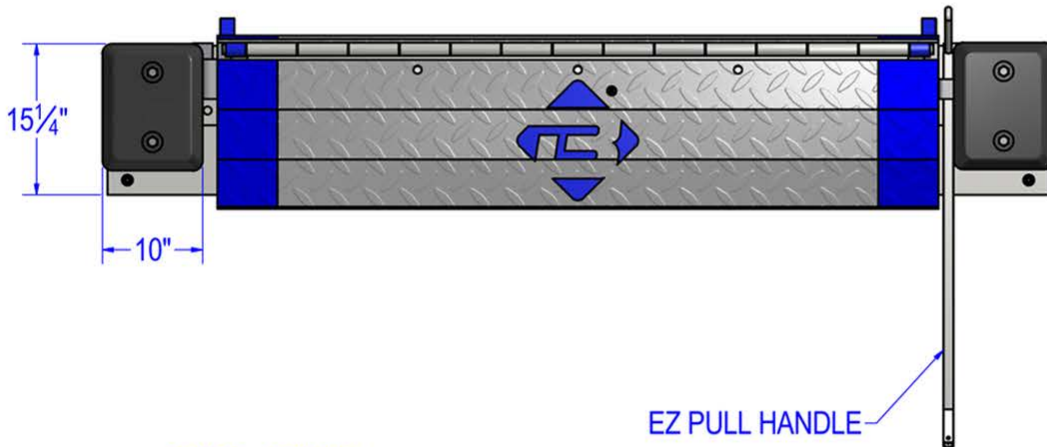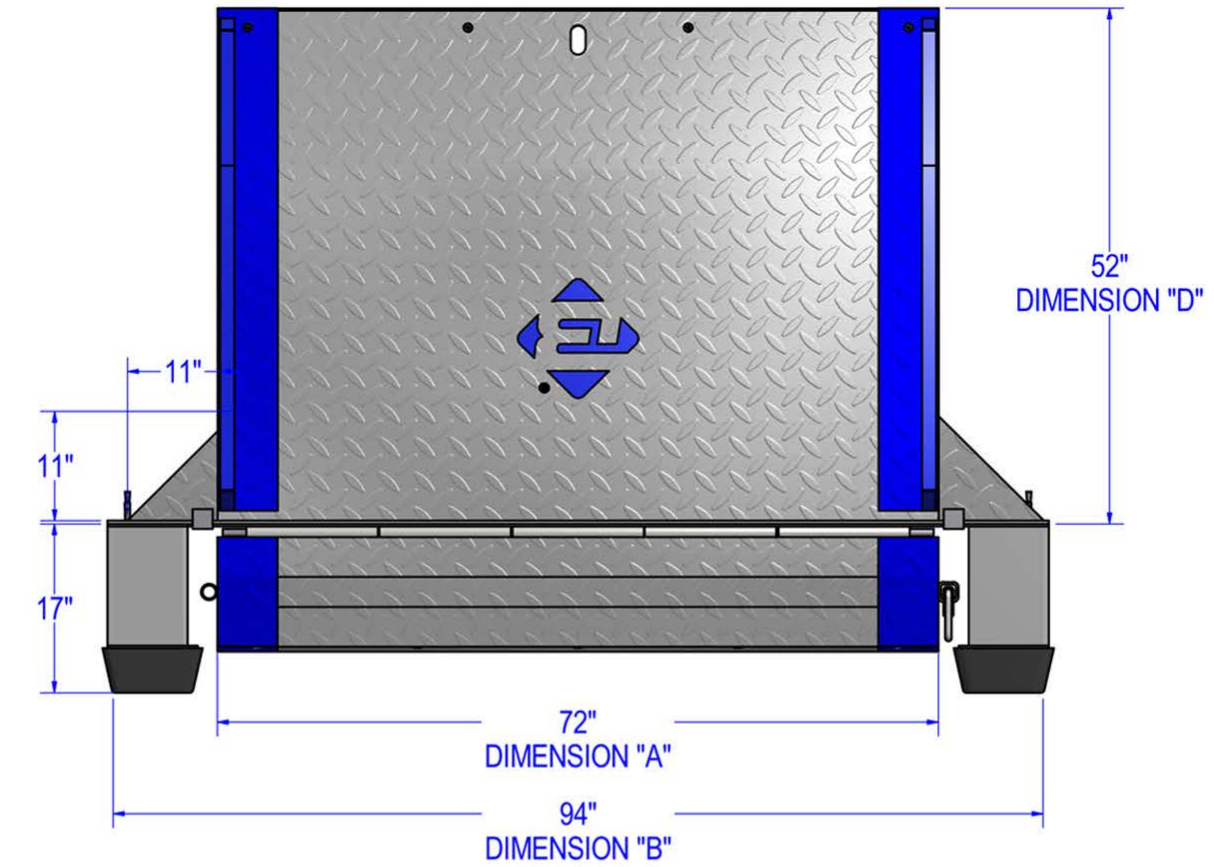

Lo-Dock Table				
MODEL #	WIDTH	OVERALL WIDTH	HEIGHT	LENGTH
20LD72-3	72"	94"	3"	30"
25LD72-3	72"	94"	3"	30"
20LD72-5	72"	94"	5"	48"
25LD72-5	72"	94"	5"	48"
20LD72-7	72"	94"	7"	52"
25LD72-7	72"	94"	7"	52"
20LD72-9	72"	94"	9"	64"
25LD72-9	72"	94"	9"	64"
20LD72-11	72"	94"	11"	78"
25LD72-11	72"	94"	11"	78"
20LD78-3	78"	100"	3"	30"
25LD78-3	78"	100"	3"	30"
20LD78-5	78"	100"	5"	48"
25LD78-5	78"	100"	5"	48"
20LD78-7	78"	100"	7"	52"
25LD78-7	78"	100"	7"	52"
20LD78-9	78"	100"	9"	64"
25LD78-9	78"	100"	9"	64"