




STEEL YARDRAMP® MODEL SYS-C

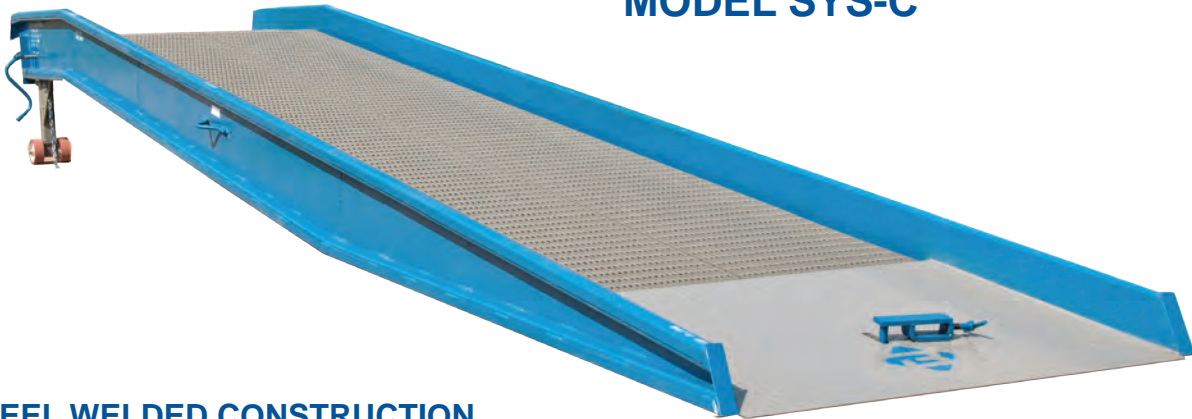

ALL STEEL WELDED CONSTRUCTION

- Capacities from 16,000 to 60,000 pounds with level off
- Steel serrated grating
- Steel casters with polyurethane for durability and smoother movement
- Beveled approach provides a smooth transition (available for 20K capacity and above)

For truck or railcar-to-ground applications, choose a 36' unit including a 6' level off.



Ramp Clamp

The Ramp Clamp assists operator in moving the Yard Ramp. Forklift tine inserts into the swiveling lift loop and is secured by a locking device.



Advantages of the YardRamp® Model with Casters

- Simple movement with ramp clamp or tow bar
- Lower maintenance costs compared with hydraulic pumps or electric motors
- Durable steel casters and adjustable legs
- Normal service range is 42" to 59", but special orders can accommodate different heights